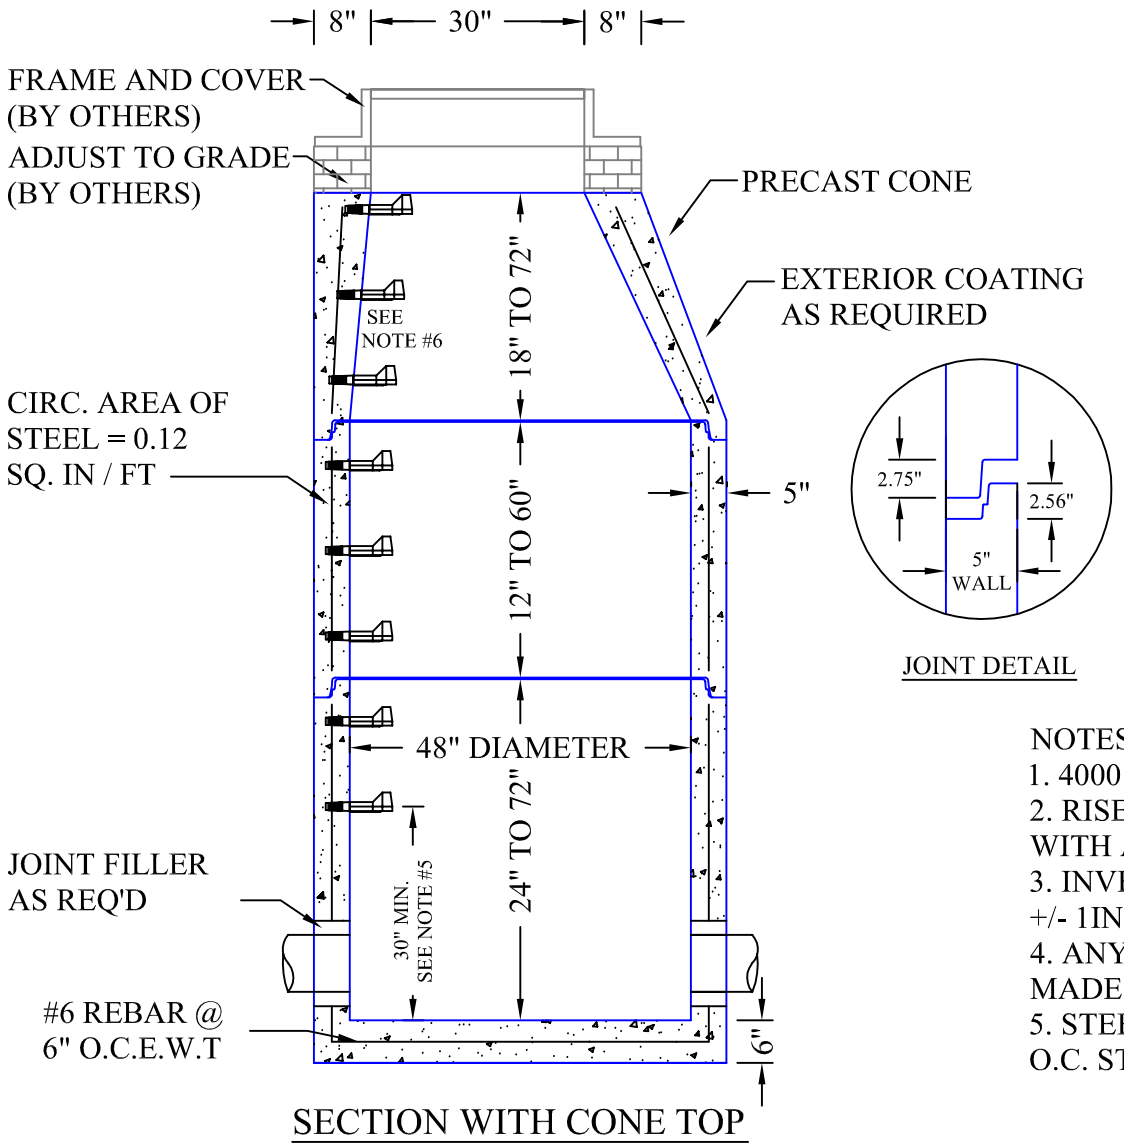

SECTION WITH CONE TOP

JOINT DETAIL

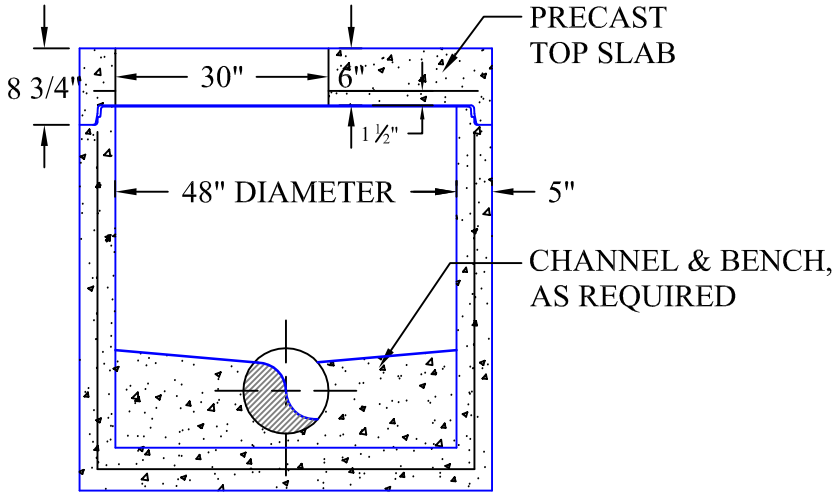

SECTION WITH SLAB TOP

NOTES:
1. 4000 PSI CONCRETE AT 28 DAYS.
2. RISERS, CONES AND SLABS IN ACCORDANCE WITH ASTM C-478, LATEST REVISION.
3. INVERT LOCATION TO WITHIN A TOLERANCE OF +/- 1INCH.
4. ANY DEVIATION FROM THIS DRAWING MUST BE MADE TO GSP IN WRITING PRIOR TO PRODUCTION.
5. STEEL REINFORCED COPOLYMER STEPS AT 12" O.C. STARTING 30" OFF FLOOR.

SHEET 1 OF 1	WEIGHT 6" BASE = 1,375 LBS PER VERTICAL FOOT = 867 LBS 6" TOP SLAB = 1,575 LBS	PRECAST 48" DIAMETER MANHOLE ASSEMBLY-STORM	GARDEN STATE PRECAST FARMINGDALE, N.J. PHONE #: 732-938-4436 FAX #: 732-938-6069