


PLAN VIEW

GENERAL NOTES:


1. NJDOT CLASS B CONCRETE.
2. CONSTRUCTION PER NJDOT SPECIFICATION.
3. UNIT HEIGHTS AS REQUIRED - IN 6" INCREMENTS
4. ANY ALTERATION TO THIS DRAWING MUST BE MADE TO GARDEN STATE PRECAST IN WRITING PRIOR TO PRODUCTION.
5. GRADE-INVERT ELEVATION < 4.0 FEET- NO STEPS ARE REQUIRED.
6. DRAWING NOT TO SCALE
7. INVERT LOCATION TO BE WITHIN A TOLERANCE OF +/- 1"
8. STEEL REINFORCED COPOLYMER STEPS @ 12" O.C.

REINFORCEMENT

WELDED WIRE FABRIC PER ASTM A-185, GRADE 70
REINFORCEMENT BARS PER ASTM A-615 GRADE 60

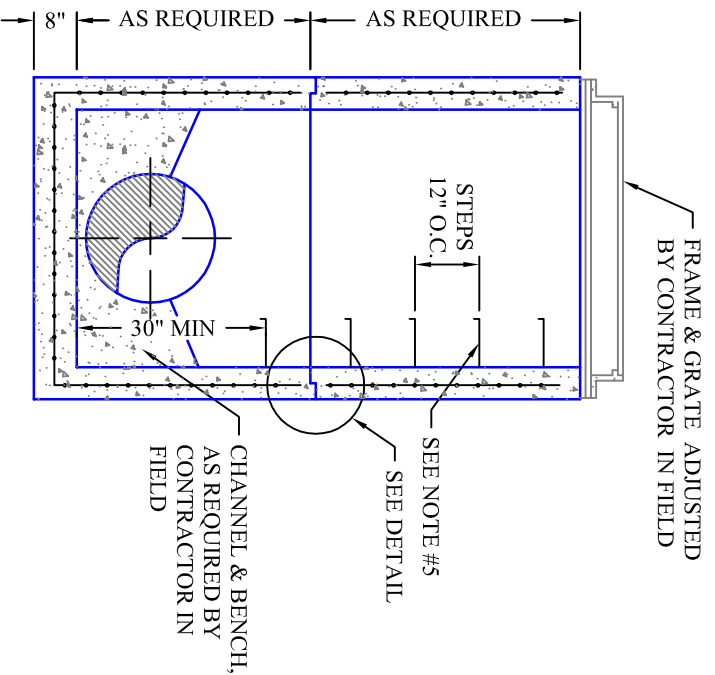

SECTION VIEW



JOINT DETAIL

REINFORCEMENT SCHEDULE:

DEPTH BELOW TOP OF GRATE:	REINFORCEMENT SCHEDULE:
0' TO 10'-0":	WWW 3X6 W6 WIRES SPACED @ 3" TO RUN HORIZONTAL IN ALL CASES
10'-1" TO 15'-1":	WWF 3 X 6 W6 ADD #3 BAR @ 18" HORIZONTAL
15'-1" TO 20'-0":	WWF 3 X 6 W6 ADD #3 BAR @ 9" HORIZONTAL OR ADD #4 BAR @ 15" HORIZONTAL
FLOOR REINFE.:	#4 BAR @ 10" O.C.E.W.T. - 2" CLR TYP.

STM-7

AUGUST 2006

SHEET 1 OF 1

WEIGHT RISER

PER VERTICAL FOOT = 1,125 LBS
8" BASE = 1,750 LBS
LIFTING HOOKS

PRECAST

"D" TYPE BASIN
30" x 48" I.D.

GARDEN STATE PRECAST

FARMINGDALE, N.J.
PHONE #: 732-938-4436 FAX #: 732-938-6069