


**PLAN VIEW**

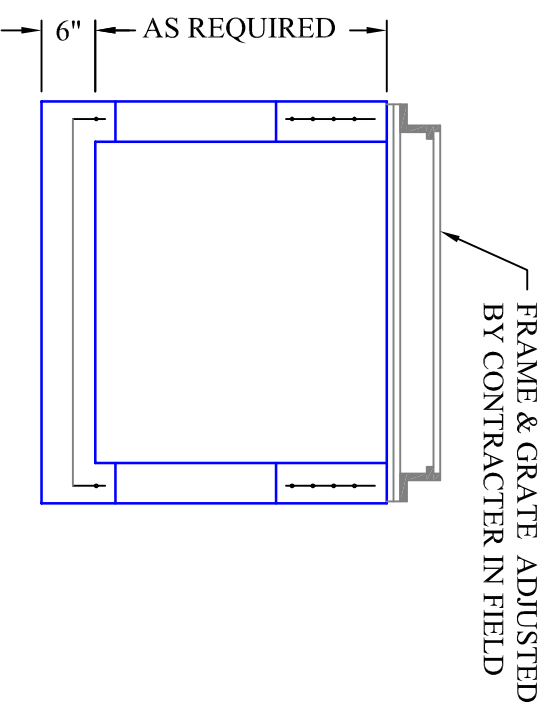

**SECTION VIEW**

GENERAL NOTES:

1. 4,000 PSI CONCRETE AT 28 DAYS
2. CONSTRUCTION PER ASTM C-913, LATEST REVISION, HS-20 DESIGN BY A LICENSED NJ PROFESSIONAL ENGINEER. COPIES AVAILABLE UPON REQUEST.
3. UNIT HEIGHTS AS REQUIRED - IN 6" INCREMENTS
4. ANY ALTERATION TO THIS DRAWING MUST BE MADE TO GARDEN STATE PRECAST IN WRITING PRIOR TO PRODUCTION.
5. DRAWING NOT TO SCALE
6. GRATES AND HARDWARE BY OTHERS
7. INVERT LOCATION TO BE WITHIN A TOLERANCE OF +/- 1"

REINFORCEMENT

- WELDED WIRE FABRIC PER ASTM A-185, GRADE 70
- REINFORCEMENT BARS PER ASTM A-615 GRADE 60

STM-8

SHEET <b>1</b> OF <b>1</b>	<b>WEIGHT</b> RISER PER VERTICAL FOOT = 750 LBS 6" BASE = 675 LBS LIFTING HOOKS	<b>PRECAST</b> "Y" TYPE BASIN 24" x 24" I.D.	<b>GARDEN STATE PRECAST</b> FARMINGDALE, N.J. PHONE #: 732-938-4436 FAX #: 732-938-6069
-------------------------------------	---	--	---