


(4) 1" HOLES FOR
GROUND RODS

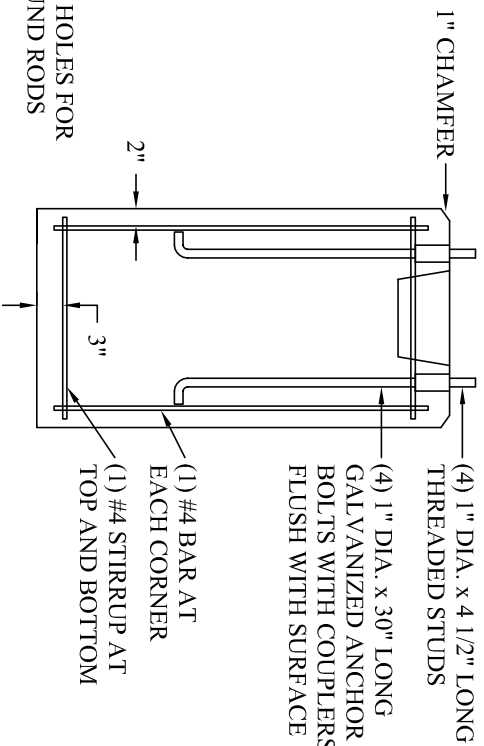

SECTION A-A

SECTION B-B

NOTES:

1. 4,000 PSI CONCRETE AT 28 DAYS.
2. REINFORCEMENT BARS PER ASTM A-615, GRADE 60 WELDED WIRE FABRIC PER ASTM A-185, GRADE 70
3. ANY ALTERATION TO THIS DRAWING MUST BE SUBMITTED TO GSP IN WRITING PRIOR TO PRODUCTION.

SHEET
1
OF
1

WEIGHT
1,300 LBS.
LIFTING
(2) 3/4" FERRULE INSERTS

PRECAST STREET LIGHT
FOUNDATION FOR 30'
POLES WITH 6' ARM
18"x18"x48"

GARDEN STATE PRECAST
FARMINGDALE, N.J.
PHONE #: 732-938-4436 FAX #: 732-938-6069