



SECTION VIEW



JOINT DETAIL

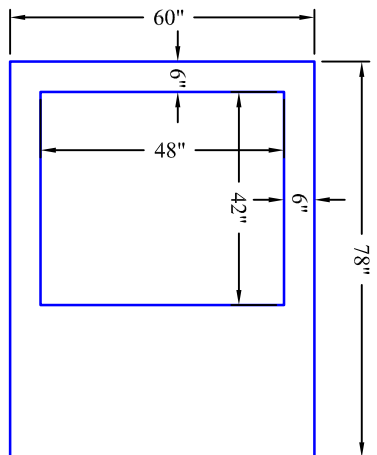

TOP SLAB PLAN VIEW

GENERAL NOTES:

1. 4,000 CONCRETE AT 28 DAYS
2. CONSTRUCTION PER ASTM C-913, LATEST REVISION, HS-20 DESIGN BY A LICENSED NJ PROFESSIONAL ENGINEER. COPIES AVAILABLE UPON REQUEST.
3. UNIT HEIGHTS AS REQUIRED - IN 6" INCREMENTS
4. ANY ALTERATION TO THIS DRAWING MUST BE MADE TO GARDEN STATE PRECAST IN WRITING PRIOR TO PRODUCTION.
5. GRADE-INVERT ELEVATION < 4.0 FEET - NO STEPS ARE REQUIRED.
6. DRAWING NOT TO SCALE
7. INVERT LOCATION TO BE WITHIN A TOLERANCE OF +/- 1".
8. STEEL REINFORCED COPOLYMER STEPS @ 12" O.C.

REINFORCEMENT

WELDED WIRE FABRIC PER ASTM A-185, GRADE 70
REINFORCEMENT BARS PER ASTM A-615 GRADE 60

AUGUST 2006

STM-4

<p>SHEET 1 OF 1</p>	<p>WEIGHT RISER</p> <p>PER VERTICAL FOOT = 1,950 LBS 8" BASE = 3,267 LBS 8" TOP SLAB = 1,860 LBS LIFTING HOOKS</p>	<p>PRECAST BASIN</p> <p>"B-2" OR "E-2" TYPE BASIN 48" x 66" I.D.</p>	<p>GARDEN STATE PRECAST FARMINGDALE, N.J. PHONE #: 732-938-4436 FAX #: 732-938-6069</p>
---	--	--	---