


PLAN VIEW

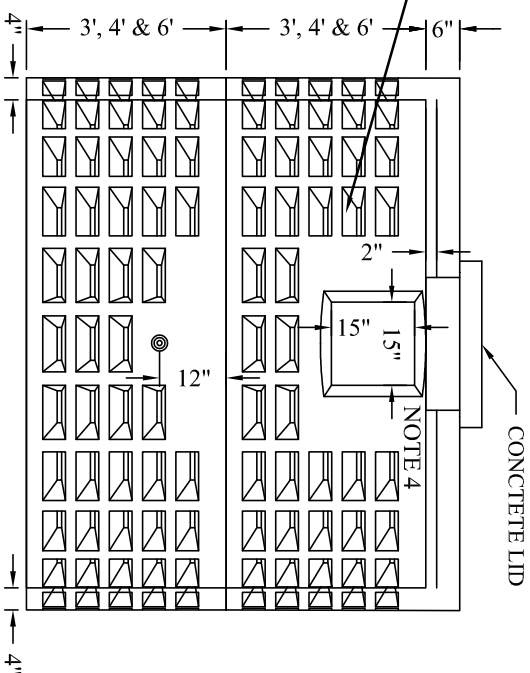

SIDE VIEW

- NOTES**
1. 4500 PSI CONCRETE
 2. TRAFFIC AND NON-TRAFFIC LOADING AVAILABLE.
 3. REINFORCEMENT STEEL PER ASTM A-185, 615 GRADE 60
 4. 15" X 15" KNOCKOUT PANELS AT 180°
- *** (3) PURPLE LIFT LOOPS IN TOP

- SIZES, WEIGHTS AND CAPACITIES:**
- 3'6" SEEPAGE PIT = 4,100 LBS. (500 GAL.)
 - 4'6" SEEPAGE PIT = 4,838 LBS. (670 GAL.)
 - 6'6" SEEPAGE PIT = 6,315 LBS. (1,000 GAL.)
 - 3' RISER RING = 2,215 LBS. (500 GAL.)
 - 4' RISER RING = 2,954 LBS. (670 GAL.)
 - 6' RISER RING = 4,430 LBS. (1,000 GAL.)
 - SEPERATE 6" TOP SLAB = 1,884 LBS.