


PLAN VIEW

- NOTES
1. 4500 PSI CONCRETE
 2. TRAFFIC AND NON-TRAFFIC LOADING AVAILABLE.
 3. REINFORCEMENT STEEL PER ASTM A-185,615 GRADE 60
 4. 15" X 15" KNOCKOUT PANELS AT 180°
 5. SPREADER BAR MUST BE USED FOR HANDLING

*** (3) GREEN LIFT LOOPS IN TOP

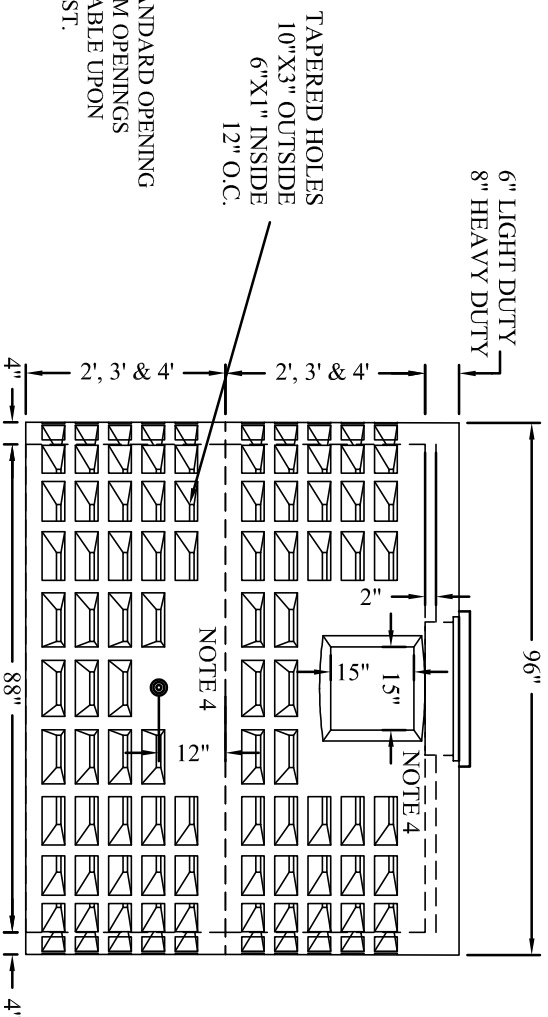

SIDE VIEW

- SIZES, WEIGHTS AND CAPACITIES:
- 2'6" SEEPAGE PIT = 5,939 LBS. (630 GAL.)
 - 2'8" SEEPAGE PIT = 7,116 LBS. (630 GAL.)
 - 3'6" SEEPAGE PIT = 7,142 LBS. (950 GAL.)
 - 3'8" SEEPAGE PIT = 8,319 LBS. (950 GAL.)
 - 4'6" SEEPAGE PIT = 8,346 LBS. (1260 GAL.)
 - 4'8" SEEPAGE PIT = 9,523 LBS. (1260 GAL.)
 - 2' RISER RING = 2,407 LBS. (630 GAL.)
 - 3' RISER RING = 3,610 LBS. (950 GAL.)
 - 4' RISER RING = 4,814 LBS. (1260 GAL.)
 - SEPERATE 6" TOP SLAB = 3,532 LBS. (NON TRAFFIC)
 - SEPERATE 8" TOP SLAB = 4,709 LBS. (TRAFFIC)

PRECAST
SEEPAGE PIT
8' O.D.

GARDEN STATE PRECAST
FARMINGDALE, N.J.
PHONE #: 732-938-4436 FAX #: 732-938-7096