



PLAN VIEW

GENERAL NOTES:

1. 4,000 PSI CONCRETE AT 28 DAYS
 2. CONSTRUCTION PER ASTM C-913, LATEST REVISION, HS-20 DESIGN BY A LICENSED NJ PROFESSIONAL ENGINEER. COPIES AVAILABLE UPON REQUEST.
 3. UNIT HEIGHTS AS REQUIRED - IN 6" INCREMENTS
 4. ANY ALTERATION TO THIS DRAWING MUST BE MADE TO GARDEN STATE PRECAST IN WRITING PRIOR TO PRODUCTION.
 5. GRADE-INVERT ELEVATION < 4.0 FEET - NO STEPS ARE REQUIRED.
 6. DRAWING NOT TO SCALE
 7. INVERT LOCATION TO BE WITHIN A TOLERANCE OF +/- 1" .
 8. STEEL REINFORCED COPOLYMER STEPS @ 12" O.C. REINFORCEMENT
- WELDED WIRE FABRIC PER ASTM A-185, GRADE 70 REINFORCEMENT BARS PER ASTM A-615 GRADE 60

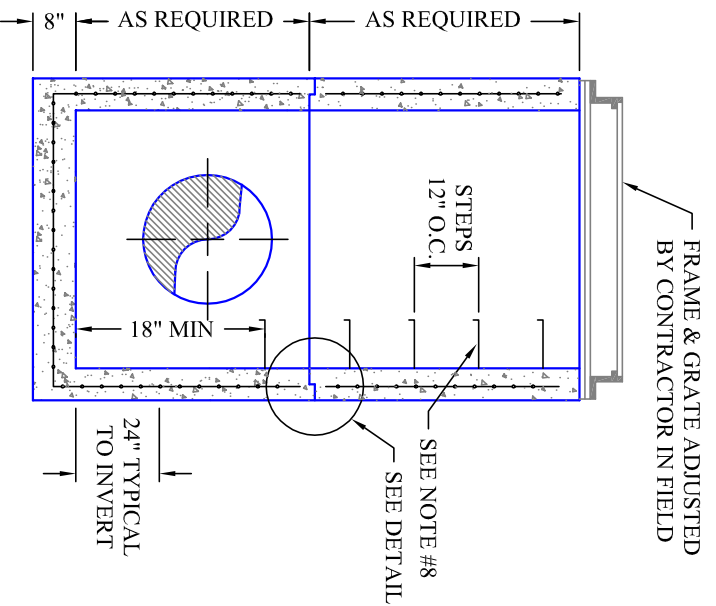

SECTION VIEW



AUGUST 2006

SHEET

1 OF 1

WEIGHT

RISER
PER VERTICAL FOOT = 1,275 LBS
8" BASE = 2,260 LBS
LIFTING HOOKS

PRECAST

"C" TYPE BASIN
42" x 48" I.D.

GARDEN STATE PRECAST

FARMINGDALE, N.J.
PHONE #: 732-938-4436 FAX #: 732-938-6069